


SLIP CLUTCHES

SPRING WRAPPED TYPE

TORQUE RANGE
1.0 TO 240.0
OZ.-INCHES

CONTINUOUS DUTY FOR USE IN TENSION CONTROL
 AND TRANSMISSION OVERLOAD PROTECTION

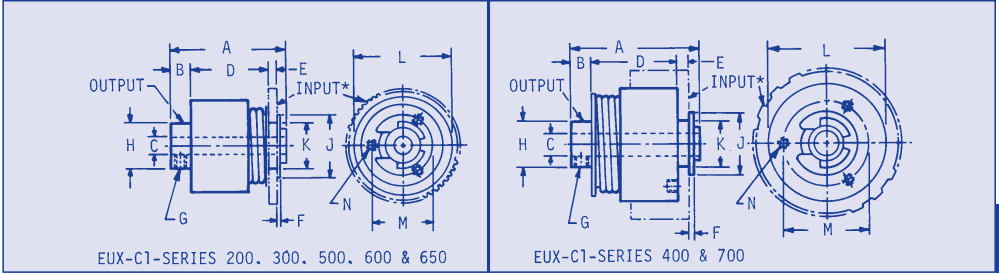

Material: Stainless steel with oil-impregnated bronze bearings. ORDER BY CATALOG NUMBER

Cat. No.	*Torque (oz. -in.)	Unit Wt. (oz.)	A	B	C +.0007	D	E	F	G	H	J MAX	K -.0008
EUX-C1-201 EUX-C1-202	9 ± 1	.9	1.05	.18	.1248 .1873	.72	.080	.03	#2-56	.38	.45 .33	.3740
EUX-C1-301 EUX-C1-302 EUX-C1-303	20 ± 2	2.4	1.24	.21	.1873 .2498 .3123	.85	.095	.04	#4-40	.50	.68	.4990
EUX-C1-401 EUX-C1-403	48 ± 5	4.1	1.39	.23	.2498 .3123	.94	.130	.04	#6-32	.50	.68	.4990
EUX-C1-500 EUX-C1-503	80 ± 8	7.5	1.39	.23	.2498 .3123	.94	.130	.04	#6-32	.63	.68	.4990
EUX-C1-600 EUX-C1-603	120 ± 12	12.5	1.67	.25	.2498 .3123	1.20	.130	.04	#6-32	.63	.68	.4990
EUX-C1-653 EUX-C1-654 EUX-C1-655	150 ± 15	17.0	1.88	.29	.3123 .3748 .4998	1.34	.130	.04	#8-32	1.00	.74	.7490
EUX-C1-702 EUX-C1-703 EUX-C1-704 EUX-C1-705	240 ± 24	20.5	1.88	.29	.2498 .3123 .3748 .4998	1.34	.130	.04	#8-32	1.00	.74	.7490

L	M	N
.63	.500	#0-80 .08 Deep
1.00	.650	#1-72 .10 Deep
1.25	.925	#2-56 .11 Deep
1.50	.925	#2-56 .11 Deep
1.87	.780	#4-40 .15 Deep
1.87	1.170	#4-40 .17 Deep
2.25	1.170	#4-40 .17 Deep

For slip couplings please see catalog section C.

For miniature slip clutch, please see catalog section F, FZX series.

*Units listed above exhibit the same torque in either clockwise or counter-clockwise direction of rotation when viewed from the input end. Other combinations of torque up to the stated torque are available for an additional set up charge. For example, the EUX-C1-401 standard unit has a pre-set torque of 48 oz. in. for both CW and CCW rotation. The unit may also be purchased with torque of 8 oz. in. in one direction and 32 oz. in. in the other. When ordering, please specify the cat. no., the desired torque in each direction, add the set up charge and allow approximately 3 weeks for shipment.

ORDERING EXAMPLE
 FOR SPECIAL UNIT

EUX - C1 - 401 - 32 - 8
 Cat. no. 32 oz.in. torque cw 8 oz. in. torque ccw

ORDERING EXAMPLE
 FOR STANDARD UNIT

EUX - C1 - 401
 Torque value of 48 oz.-in. in each direction would be supplied.

NORDEX

(800) 243-0986
 In CT (203) 775-4877

34E